


Astria
2010

T3 Sterope

Technical Specifications and Frequency Response

Model	T3 Sterope
Description	Floorstanding speaker
Speaker System	2 way system
Enclosure Type	Series Double Reflex, Front Vented
Shielded Components	
Tweeter	25mm (1") Silk Dome
Midrange	
Woofer	130mm (5 1/4") PP Cone
Freq. Response @ ±3dB	
on reference axis	46 - 25k Hz
on 30° axis	46 - 16k Hz
Crossover frequency	1.48 kHz
Slope	6 / 6 dB oct
Power handling	
on unclipped program	100W @ 8Ω
Recommended Amplifier	10-100W @ 8Ω
Sensitivity (2.83V/1m)	88 dB
Nominal Impedance	8 Ω
Minimum Impedance	7,5 Ω @ 240 Hz
Net Weight	13,6 kg
Shipping Weight	16,1 kg
Dimensions	175 x 1022 x 210 mm
(H x W x D)	6"15/16 x 40"1/4 x 8"15/16
Shipping Dimensions	37,5 x 38 x 112 cm
(H x W x D)	14,8"x 15"x 22"
Finishes	BL: Black cloth and Wood base AG: Silver cloth and Black base

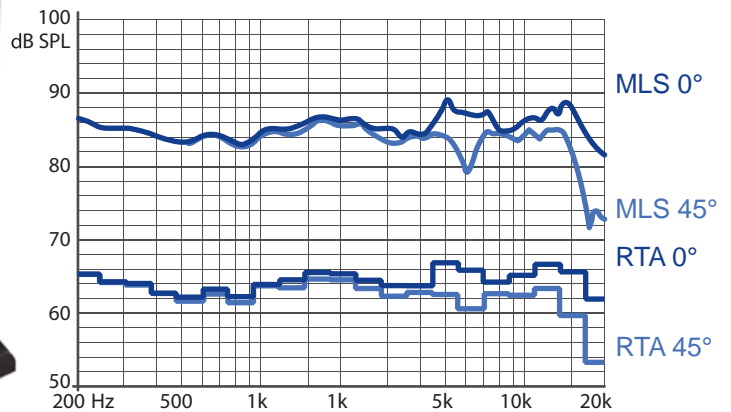

La risposta in frequenza è dichiarata a partire da 200Hz in quanto riteniamo che la risposta stessa venga influenzata in modo determinante dall'ambiente in cui sono posizionati i diffusori.

Frequency response is shown from 200Hz because the listenign room could have a big influence on the response of the loudspeakers.

